

We provide your solutions

CDI-MA

## TELEMETERING(MODEM LINE USE)ARRESTER CDI-MA



It is designed to use for protection of precise field instruments from various danger of surge, high voltage noise, lightning, etc. Into communication transmitting line.

### MODEL & SPECIFICATION CODE

#### ● FEATURES


Small size(mm) :  
99.15(H),25(W),61.1(D)  
Case & color :  
Black ABS plastic case

#### ● INSTALLATION

Operating temperature :  
-5~+55°C  
Operating humidity :  
90% RH max.(non condensing)  
Mounting : channel mount

- **Model : CDI-MA**
- **Discharge Voltage**  
1.2V or more
- **Max. Surge Voltage**  
15V or less
- **Response Time : 0.1 microseconds or less**
- **Discharge current : 10,000A(8x20 microseconds)**
- **Max. Load Current : 100mA**
- **Internal Series Resistance : 8 ohm or less**  
(Including return)
- **Permissible Leakage Current**  
btwn line : 20μA or less  
btwn line & gnd : 10 A or less
- **Capacity Btwn Lines : 1μF**
- **Max. Line Voltage : 1.2V**

### CONNECTION DIAGRAM

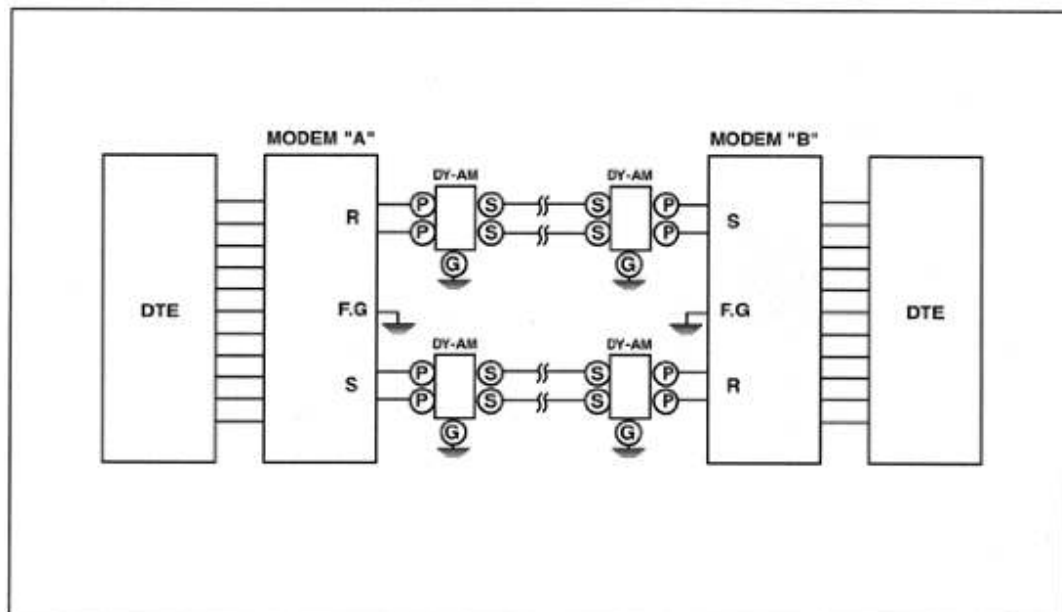


We provide your solutions

# TELEMETERING(MODEM LINE USE)ARRESTER CDI-MA



## SCHEMATIC CIRCUIT & CONNECTION

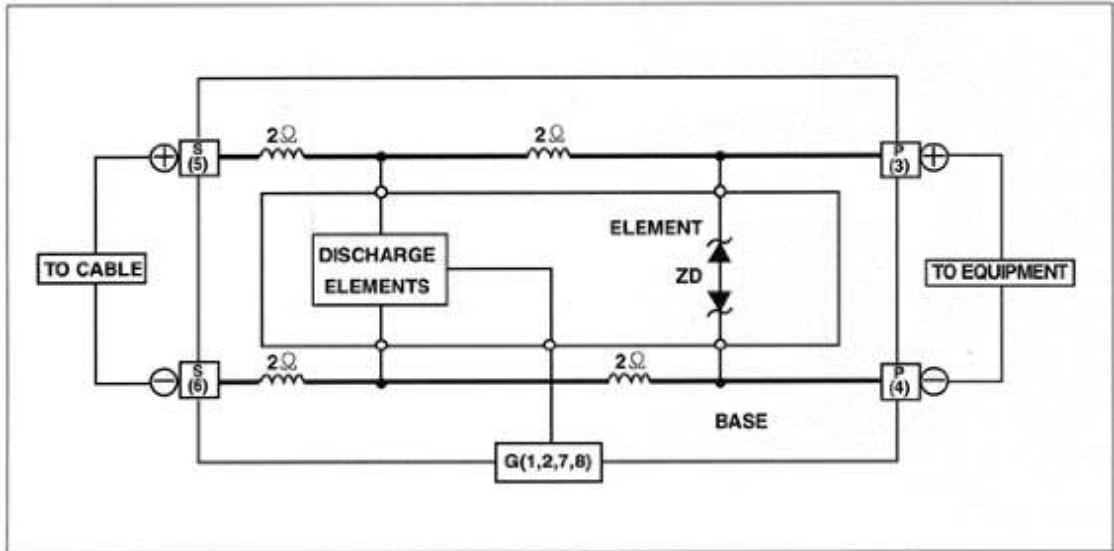

## TERMINAL ASSIGNMENT

