

We provide your solutions

CDI-MA

TELEMETERING(MODEM LINE USE)ARRESTER CDI-MA



FEATURES

Small size(mm) :
99.15(H),25(W),61.1(D)
Case & color :
Black ABS plastic case


INSTALLATION

Operating temperature :
-5~+55°C
Operating humidity :
90% RH max.(non condensing)
Mounting : channel mount

MODEL & SPECIFICATION CODE

- **Model : CDI-MA**
- **Discharge Voltage**
1.2V or more
- **Max. Surge Voltage**
15V or less
- **Response Time : 0.1 microseconds or less**
- **Discharge current : 10,000A(8x20 microseconds)**
- **Max. Load Current : 100mA**
- **Internal Series Resistance : 8 ohm or less**
(Including return)
- **Permissible Leakage Current**
btwn line : 20 μ A or less
btwn line & gnd : 10 A or less
- **Capacity Btwn Lines : 1 μ F**
- **Max. Line Voltage : 1.2V**

CONNECTION DIAGRAM

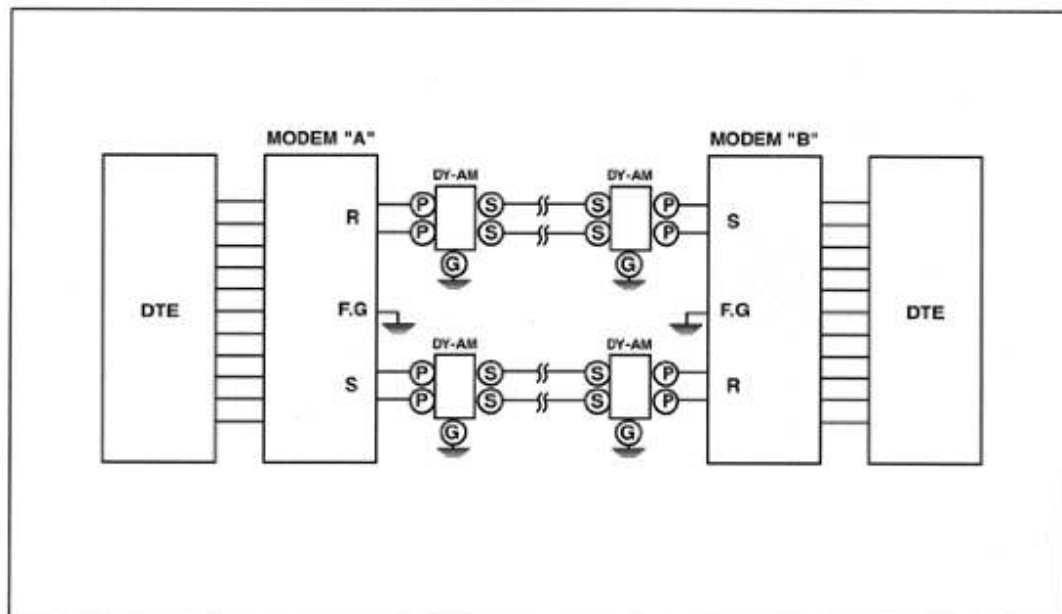


We provide your solutions

TELEMETERING(MODEM LINE USE)ARRESTER CDI-MA



SCHEMATIC CIRCUIT & CONNECTION

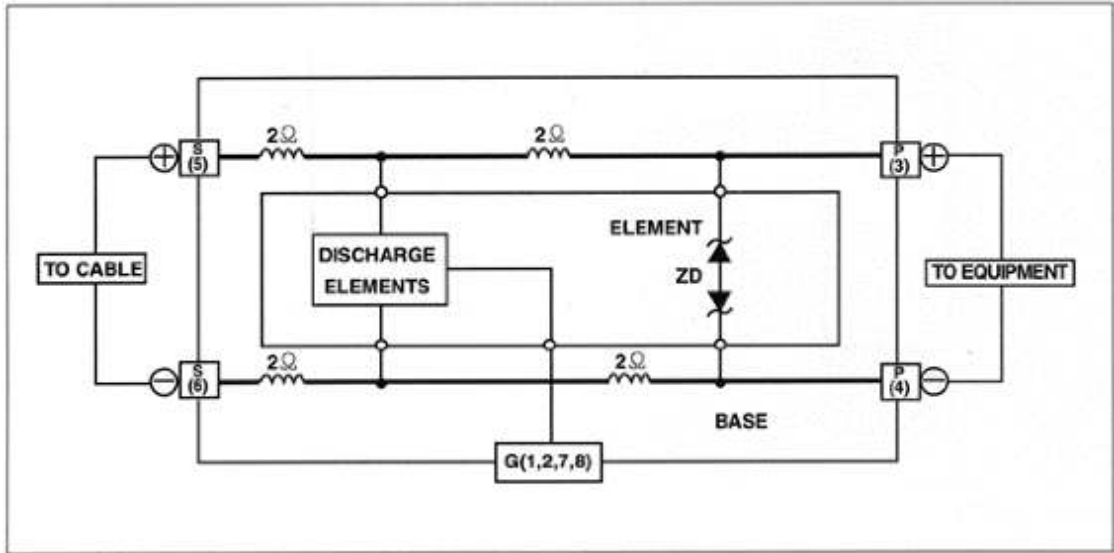

TERMINAL ASSIGNMENT

